# EVALUATION OF THE DYNAMICAL MODELLING OF LA VALETTE LANDSLIDE (FRANCE)

LUDOVICUS P.H. VAN BEEK

Ludovicus P.H. Van Beek - Department of Physical Geography, Universiteit Utrecht, The Netherlands.

## Abstract

In this paper the results of two empirical dynamical models based on the concept of rate dependent shear strength are evaluated for the mass movement complex of La Valette. The mobility characteristics for the models were obtained from ringshear tests and applied in a one-dimensional stability model, linking the rate of movement to the inverse safety factor for the middle part of the complex. The required pore pressure fluctuations have been calculated on a daily basis by means of a simple linear store tank model, using effective rainfall as input. The predicted displacements of the different dynamical models are compared to the observed values and their validity is discussed with respect to the mobility of La Valette landslide.

Key words: landslide, models.

#### Riassunto

Valutazione della modellazione dinamica della frana di La Valette (Francia). In questa nota sono discussi i risultati di due modelli dinamici empirici basati sul concetto di resistenza al taglio dipendente dalla velocità con riferimento alla frana di La Valette. Le caratteristiche di mobilità per i modelli sono state ottenute da prove di taglio anulare e applicate in un modello di stabilità unidimensionale, correlando la velocità di movimento con l'inverso del fattore di sicurezza per la parte centrale della frana. Le fluttuazioni della pressione interstiziale sono state calcolate su base giornaliera tramite un semplice tank model, utilizzando nel modello i dati di precipitazione effettiva. Gli spostamenti della frana di La Valette previsti da diversi modelli dinamici vengono confrontati con i valori effettivamente misurati e viene discussa la validità dei modelli.

Parole chiave: frana, modelli.

### 1. INTRODUCTION

The mass movement complex of La Valette consists of series of interrelated mass movement events which occurred since March 1982, when excessive pore pressures along the contact between more permeable Flysch deposits and the underlying Terres Noires (black marls) triggered a large scale rotational slide (*RTM*<sup>1</sup> *Digne*, 1982). The disturbance of the drainage of the upper slope led

consequently to the mobilisation of the regolith consisting of weathered Terres Noires and clayey moraine deposits in the lower zone. Here, on the *amont* a total of 3.000.000 m<sup>3</sup> is displaced (*RTM Digne*, 1982).

A catastrophic movement occurred in January 1988, after an abrupt thawing period. Excess pore water forced 55.000 m<sup>3</sup> of morainic material to flow in the lower course of the Serre ravine where it reached a barrier some 1000 m from its source area in less than one day. The subsequent stress release in the source area and similar thawing conditions in March of that year

<sup>&</sup>lt;sup>1</sup> branch Restauration des Terrains en Montagne of the Office National des Forêts

Van Beek L.P.H. (1999) - Evaluation of the dynamical modelling of La Valette landslide (France). In: M. Panizza, M. Soldati, M. Bertacchini, Th.W.J. Van Asch & S. Malmusi (eds.), The Erasmus 96-97 Programme in Geomorphology: Intensive Course in the French Alps and Students' Mobility. Dipartimento di Scienze della Terra, Università degli Studi di Modena e Reggio Emilia, 33-39.

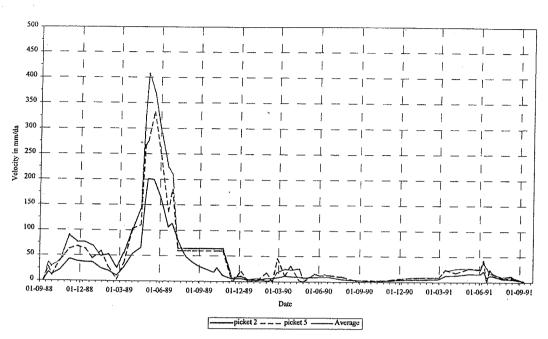


Fig. 1 - Velocities for pickets 2 and 5 and on average for the pickets 1-13; 9 September 1988 till 10 September 1991.

initiated a second, more rigid earth flow with a far lower run-out distance. As a result, the morainic deposits in the middle part were mobilised, both movements amounting to 600.000 m<sup>3</sup>.

To prevent further catastrophic development remedial measures were taken by the RTM, including the drainage of surface- and ground-water.

In addition, the superficial displacements in the middle part of the landslide complex were monitored along a survey line, roughly perpendicular to the direction of movement, from 9 September 1988 till 10 September 1991 (Fig. 1). Because of the volumes of material entering the Serre ravine the middle part was assumed to be sliding *en bloc* over a base of Terres Noires. Volumetric displacements were calculated by multiplying the observed displacements of pickets with the corresponding area under the profile which was determined by the CETE<sup>2</sup> using seismic refraction methods (total area =

<sup>2</sup> Centre des Études Techniques de l'Equipment

4252 m<sup>2</sup>).

From 9 September 1988 to 10 September 1991 the maximum total displacement amounted to 52,2 meter for picket 2 of the survey line. From the observed displacements mean daily velocities have been calculated by dividing them over the time between two observations. The maximum velocity for the area was observed from the 27th of April to the 3rd of May 1989 when 881 m<sup>3</sup>xd<sup>-1</sup> passed the survey line, what corresponds with an average velocity of 0,2 mxd-1. The highest velocity in this period (0,4 mxd<sup>-1</sup>) was observed at picket 2, while at the cascade velocities of 1 mxd-1 were found. There is an obvious relation between rainfall through the resulting pore pressure fluctuations and movement for the area (Fig. 2), although a break in the trend can be discerned due to the extensive drainage works which were accomplished in the same period (RTM, October 1990).

However, to explain the observed limiting strain rates a regulating mechanism is needed in addition to the concept of plasticity alone for this predicts indefinite

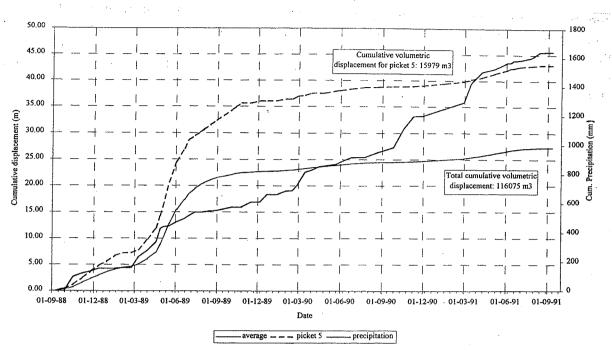


Fig. 2 - Cumulative precipitation and cumulative displacements for picket 5 and on average for the pickets 1-13; 9 September 1998 till 10 September 1991.

acceleration after failure (Keefer & Johnson, 1983). With this design numerous dynamic models have been proposed based on the concept of rate dependent shear strength (Minzuno, 1989; Van Asch, pers. comm.). According to this concept the strain under the excess shear stress is controlled by the viscous drag in a shear zone above the sliding plane. With increased shear stress additional strength is mobilised in the shear zone and the overlying material is displaced as a rigid mass with a uniform velocity.

Two empirical rate dependent shear strength models are evaluated here for La Valette landslide. The first, presented by *Nieuwenhuis* (1991), describes the strain rate as lineary dependent on the natural logarithm of the shear stress ratio  $\tau/\tau_0$ 

$$\ln (v/v_0) = a \times \ln (\tau/\tau_0) \tag{1}$$

where:

- a is a factor, intrinsic to the material,
- vo is the strain rate associated with the

yield strength  $\tau_0$  ( $\tau < \tau_0$ ,  $\nu = 0$ ),

- is the actual shear stress and v is the corresponding strain rate.

The second (*Van Asch*, pers. comm.), describes the mobility characteristics of the slip surface as a tangent hyperbolic function of the form:

$$y = 1 - a (tanh(b) - tanh (x + b))$$
 (2)

where:

- y is the shear stress ratio  $\tau/\tau_0$
- x is  $\ln (v)$  in mmxd-1 (hence y = 1 for x = 0).

Unlike Equation 1 that describes the indefinite increase of the strain rate with an increasing shear stress ratio, the shear stress ratio y of Equation 2 varies between the two asymptotic values which are given by:

$$y = 1 - a (tanh(b) \pm 1)$$
 for  $x = \pm \infty$  (3)

and which delimit the mobile range, the interval over which the material behaves in conformity with the concept of rate

dependent shear strength. The lower limit  $\tau/\tau_{0 \text{ min}}$  denotes the yield strength whereas the upper asymptotic value  $\tau/\tau_{0 \text{ max}}$  can be considered as the stress ratio limit for plastic strength at which the velocity increases infinitely (*Van Asch*, pers. comm.).

For both dynamical models the excess shear stress, expressed as the inverse safety factor, has been calculated by means of a limiting equilibrium model. Since the middle part of La Valette complex can be considered as an non restricted planar slide an infinite slope model is presumed to be appropriate. Daily pore pressures are calculated through a linear store model, using effective rainfall as input.

Tab. 1 - Model parameters of the linear store tank model and of the infinite slope model.

Parameters of the linear store tank model		
recharge parameter	100%	
multiplication factor for discharge area	2	
after 1.10.89	1	
depth of aquifer	20 m	
klinear = depth/k <sub>Darcy</sub>	2325 days	
porosity	n = 38%	

Parameters of the infinite slope stability model	
residual shear strength	c' <sub>p</sub> = 0 kPa
	φ'r = 24,5
topography	inclination: 18°
	depth: 20 m

## 2. MODEL DESCRIPTION

The required mobility characteristics have been determined in the laboratory by means of ring shear tests in an apparatus based on Bishop's design (*Nieuwenhuis*, 1991). The effects of rate dependent shear strength have

been determined by performing straincontrolled, consolidated tests on a sample composed from morainic material in the middle part of La Valette landslide. During all tests the applied effective normal stress was 86,1 kPa. The resulting shear stress was recorded at strain rates of 0,2, 2, 4, 5 and 10°xh-1 (corresponding with 5, 52, 105, 131 and 262 mmxd<sup>-1</sup>). For the morainic material within the mass movement complex of La Valette a gain of 3% in shear strength was observed for an increase in speed from 0.2 to 10°xh<sup>-1</sup>. For the model of Equation 2. the small difference  $\Delta \tau/\tau_0$  -or mobile range- of 0.03 influences also the viscosity index, which is defined as the maximum slope within this interval (Van Asch, pers. comm.).

In a regression of the ringshear tests (R<sup>2</sup>) = 99%) the constants a and b were found to amount to respectively  $a = 1,447 \ 10^{-2}$  and b = -4.368. The plastic strength  $\tau/\tau_{max}$  for the material is nearly 1,03. Due to the assumption that the initial velocity at failure (1/F = 1) is 1 mmxd<sup>-1</sup>, the yield strength  $\tau/\tau_{0 \text{ min}}$  is slightly below 1. This assumption for the initial velocity, however, is justified by the minimal field displacements along the survey line, which were close to 1 mmxd<sup>-1</sup>. The same strain rate was taken as the minimal velocity  $v_0$  in the model of Nieuwenhuis (1991). The value of the factor a, based on a linear regression on the same data, was  $136,162 (R^2 = 91\%)$ . Here the intercept of the Y-axis of 0,437 is a considerable source of error although it is of minor importance for the assessment of larger displacements.

The peak and residual shear strength were determined by triaxial compression tests. Peak strength for the undisturbed morainic material amounts to c'p = 0 kPa,  $\phi'_p$  = 26,8° (n = 10, R<sup>2</sup> = 98%). With a strain of 16% the incompletely developed residual strength for 4 samples (R<sup>2</sup> = 95%) has a  $\phi'_r$  of 24,5° (c'<sub>r</sub> is assumed to be zero).

With the mobility characteristics the

displacements have been calculated, using the inverse safety factor for the shear stress ratio. The stability model used is an infinite slope model for which seepage parallel to the surface is assumed. The pore pressure was estimated by the ground water level that was obtained by a linear store model. The parametrisation of this model, for which the Terres Noires were considered as an impermeable boundary, is given in Table 1. The geometry is based on the values for picket 5 of the survey line, the permeability is defined as the depth of the aquifer divided by the saturated hydraulic conductivity  $(k_{sat} = 8.6 \times 10^{-3} \text{ m} \times \text{d}^{-1}, \text{ determined by}$ inverse auger hole method).

For the input precipitation data of the station "le Verger" of the Office National des Forêts have been used. The initial ground water level at 09.09.1988 is set to 11,66 m, the value for limiting equilibrium.

To represent the fractured nature of the moraine cover the recharge parameter of the model has been set to 100%. Before 1 October 1989, the date arbitrarily set for the drainage to come in effect, the area of discharge is taken to be 2, the ratio between the upper slope and the middle part of the landslide complex (Fig. 2). After the effectuation of the drainage this parameter is set to 1.

## 3. MODEL RESULTS

The observed and predicted strain rates against the safety factor of the one-dimensional model are given in Fig. 3. As is apparent in Fig. 3, the observed velocities are in general overestimated by the model proposed by  $Van\ Asch$  (pers. comm.). The calculated ground water levels (Figs. 3 and 4) are in a small range, resulting in a safety factor close to unity. From 27.04.1989 till 24.10.1989, the period in which the highest velocities were observed, the inverse safety factor exceeded the plastic limit  $\tau/\tau_{0max}$  of

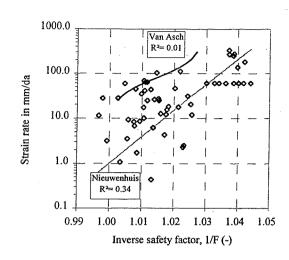


Fig. 3 - Observed and predicted strain rates according to the models by Van Asch and versus the calculated inverse safety factor  $\tau/\tau_0$ .

1,03 continuously but no catastrophic development occurred.

This is probably the consequence as the model underestimates the contribution of the rate dependent shear strength to the stability, either because of the importance of some other strain regulating mechanism (see *Van Beek & Van Asch*, 1996) or because of the nature of the hyperbolic tangent that in combination with the scarce data gives too low a threshold.

A better correlation ( $R^2 = 34\%$ , n = 61), is obtained by the model presented by *Nieuwenhuis* (1991). In the light of Fig. 4 in which the model results and the observed velocities are plotted its performance can be explained in more detail; the model is able to predict the magnitude of the strain rates adequately but lags by some weeks with the observed values. This is probably due to the parametrisation of the hydrological model, especially to an underestimation of the hydraulic conductivity of the material. Calibration of this model, if it were possible, would certainly improve its predictive potential.

In consideration of the past catastrophic events the analysis of the dynamic stability

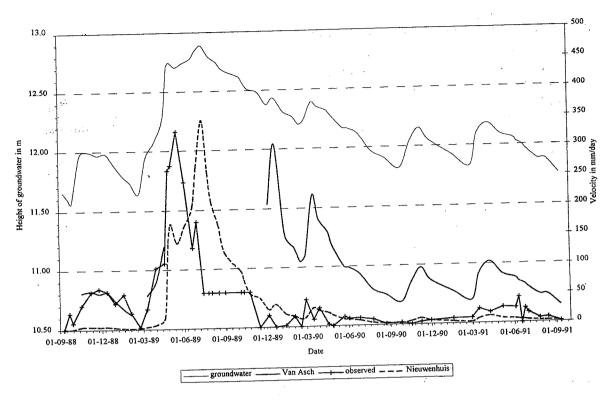


Fig. 4 - Model results: predicted and observed velocities for picket 5.

models give an estimation for a worst case scenario for the complex under the present drained conditions. The large displacements of the spring and summer of 1989 were only achieved after a cumulative rainfall in the fall and winter and was maintained by subsequent high rainfall in spring and summer. On the same assumption for the effectiveness of the drainage system it will require the double amount of precipitation in the same period, amounting roughly to 1200 mm. With regard to the annual rainfall of 763 mm it seems unlikely that these critical levels can be reached under the present, drained conditions.

## 4. CONCLUSIONS

Although the correlation between observed and predicted strain rate values is significant for the approach suggested by *Nieuwenhuis* (1991) and the actual values are approximated by it, the predicted values tend to lag with the observations. Better

predictions should therefore be possible if a data-set for the calibration of the hydrological model were available. The model presented by Van Asch (pers. comm.) underestimates the contribution of viscous drag to the rate dependent shear strength. However, in the evaluation of the two dynamical models for La Valette landslide, the material, as reflected in the mobility characteristics, is highly sensitive to an increase in the shear stress ratio  $\tau/\tau_0$ . The total range of the inverse safety factor based on the linear store model ranges from 1 to only 1,04, what corresponds with a 1,3 m rise in groundwater level from 11,6 m at limiting equilibrium for residual strength conditions to 12,9 m. In this range the predicted and observed strain rates vary from total rest to  $0.35 \text{ mxd}^{-1}$ .

Under the present drained conditions catastrophic movement is unlikely to reoccur. However, given the sensitivity of the material to the shear stress ratio and the rates can be achieved if more water can infiltrate. Therefore, in addition of the

careful maintenance of the drainage network, continued monitoring of displace-

ments and piezometric levels is required.

#### References

KEEFER D.K. & JOHNSON A. M. (1983) - Earth flows -Morphology, mobilization and movement. U.S. Geological Survey Professional Paper, 1264.

MINZUNO K. (1989) - Landslides of clayey slopes with a wavy slip surface: Model and its implications. Science Reports of the Institute of Geoscience, University of Tsukuba, 87-151.

NIEUWENHUIS J.D. (1991) - The life time of a landslide. Variation in stability, and displacements of a shallow seasonal landslide in

varved clays. Thesis Utrecht University.

RTM (1989-1990) - Reports on the la Valette landslide (in cooperation with the CETE),

Digne/Aix-en-Provence.

VAN BEEK L.P.H. & VAN ASCH TH.W.J. (1996) - The mobility characteristics of slow moving landslides. In: K. Senneset (ed.), Landslides - Proceedings of the 7th International Symposium on Landslides. Balkema Rotterdam, 1417-1421.